



For Earth, For Life  
Kubota

T

## KUBOTA LAWN TRACTOR T Series T2090/T2290

Easy to operate, fun to drive, the Kubota T Series is durable, and packed with premium features to keep you mowing efficiently and comfortably.



# NEW T SERIES

T2090/T2290



# Everything you want in a premium lawn tractor and more.

Step up to the Kubota T Series and get more of everything you want in a premium lawn tractor. More comfort to keep you relaxed and refreshed. More convenience to make the job easier. More efficiency to get the job done fast. And, of course, more Kubota dependability and durability to keep your T Series doing what the T Series does best: making your lawn look great.



**Fabricated mower deck**



**High-back suspension seat with armrest\***

*\*Suspension and armrest standard on T2290 only*

**WARRANTY\* :  
4 YEARS / 300 HOURS**

## NEW T90 Series improvements:

- A.** Engines: Briggs&Stratton® and Kawasaki®
- B.** High-back seat
- C.** 12V power outlet
- D.** Heavy-duty tubular frame
- E.** Cast Iron front axle
- F.** Small turning radius: just 14"
- G.** NEW Fabricated mower decks
- H.** Ergonomic operator layout
- I.** Extended Warranty



*\*Please see the Kubota Owner's warranty information guide for full details.*

# Designed for comfort.

The T Series was designed with one goal in mind: to make your job as easy and comfortable as possible. Everything about the T Series says “comfort,” from the supremely soft and supportive high-back seat to the spacious flat foot rest. Operating the T Series is also easy, making short work of even long mowing jobs.

## Short 14" turning radius

Just 14" is all you need to turn a T Series lawn tractor, letting you easily maneuver around posts, light fixtures, and other hard to mow-around objects. This Best in Class turning radius also comes in handy when transporting and storing your T Series lawn tractor.



## Easy cutting height adjustment from your seat



**1** Pull the lever to lift the deck



**2** Use the dial to adjust the cutting height




**3** Release the lever to lower the deck

Reverse  
Forward

## Hydrostatic transmission

Both T Series lawn tractors incorporate a pedal foot-operated hydrostatic transmission that simplifies control of speed and direction, leaving your hands free at all times for precise steering around trees and shrubs or maneuvering in confined spaces.

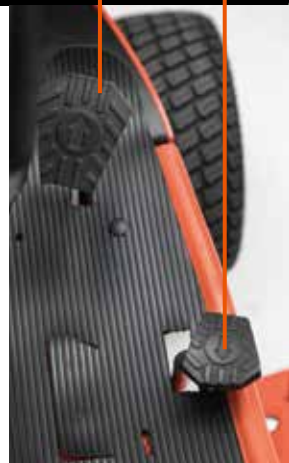

# Yours.



## High-back seat

For extra cushioning and support, all T Series lawn tractors are equipped with a high-back seat that can be adjusted to accommodate drivers of different sizes. Dual armrests are standard on the T2290, optional on the T2090. It's a level of comfort you'll soon appreciate after just minutes in the driver's seat.



## Suspension seat (T2290)

The T2290 features a high-back suspension seat with parallel link suspension that provides an even greater level of comfort and support. The seat adjusts a full 4 inches forward and back, letting you find just the right position for you.



## New steering wheel

A new, thicker, easier to grip steering wheel ensures maximum control and ease of operation while reducing vibrations. The steering wheel is positioned higher to reduce fatigue and enhance operator comfort and control.

“Mowing is easier—  
and more comfortable—  
since I gave the job to  
my T Series.”

## Flat foot rest

The T Series features the flattest foot rest in its class—no bumps, no humps, nothing to get in the way of your feet and your comfort as you work. Getting on and off are easier, too!



# Ready when you are.

Built Kubota-strong, the T Series won't let you down. You can be sure that when you are ready to go to work, your Kubota T Series lawn tractor will be ready, too.



## New high power gasoline engine

Rugged and dependable gasoline engines have plenty of power to get you up the hill without stalling. Both the T2090 and the T2290 have powerful 2-cylinder V-twin engines.



**T2090 model**  
(Powered by Briggs & Stratton® engine)



**T2290 model**  
(Powered by Kawasaki® engine)

**WARRANTY\* :**  
**4 YEARS / 300 HOURS**

## Enhanced durability

A new tubular-frame structure enhances the T Series already exceptional durability, rigidity, and strength. Even under tough terrain conditions—irregular lawn layouts, steep slopes, etc.—your T Series lawn tractor will continue to provide years of dependable service.



*\*Please see the Kubota Owner's warranty information guide for full details.*



## Front axle

Cast from ductile cast iron, the T Series strong and durable front axle easily handles the bumps and shocks of extreme mowing jobs to ensure a long and dependable service life.

**Optional kits:**



- **Grass catcher**  
2 bag with 7 Bushel capacity



- **46" Two Stage Snow Blower**
- **48" Snow Blade**

**Single-v-belt**

**Steel pulleys**

**Fabricated mower deck**

**Fabricated mower deck**

The mower deck has also been upgraded to improve durability. Fabrication gives the T Series' mower deck excellent rigidity and strength ensuring years of trouble-free operation and reduced maintenance.

**Mulching kit (optional)**

An optional mulching kit converts the mower deck into a high-precision mulching deck that produces an even finer mulch and sends it straight back into the turf.

*“ My T Series is dependable. I can count on my T Series to always be ready to do the job. ”*



# Specifications

Model		T2090BR-42	T2290KW-42	T2290KWT-48	
<b>Engine</b>	Model	GH660V		GH739V-3	
	Type	Air cooled 2 cylinders gasoline engine			
	Gross Horsepower	HP	20*	21.5**	
	Total displacement	cu.in. (cc)	40.0 (656)	44.3 (726)	
	Starting system		Key switch		
<b>Dimensions</b>	Overall length	in. (mm)	74.8 (1900)	75.2 (1910)	
	Overall w/ Mower width	in. (mm)	54.8 (1392)	60.6 (1540)	
		w/o Mower	in. (mm)	39.8 (1010)	
	Overall height	in. (mm)	51.4 (1305)	51.6 (1310)	
<b>Minimum ground clearance</b>	in. (mm)	140		145	
<b>Wheelbase</b>	in. (mm)	51.0 (1295)			
<b>Tire / Tread</b>	Front tread	in. (mm)	32.1 (816)		
	Rear tread	in. (mm)	29.9 (760)	29.7 (755)	
	Tire size	Front tire	15 x 6.0 - 8		16 x 6.0 - 8
		Rear tire	20 x 10.0 - 10		22 x 10.0 - 10
<b>Weight (w/ Mower)</b>	lbs. (kg)	595 (270)	622 (282)	661 (300)	
<b>Minimum turning radius</b>	in. (mm)	14 (356)			
<b>Transmission</b>		Hydro-Gear® T3HD®		Hydro-Gear® G730®	
<b>Transmission system</b>		1-HST w/ Gear Reduction			
<b>Speed control</b>		Foot Pedal			
<b>Traveling speed range</b>	Forward	mph (km/h)	0 - 5.7 (0 - 9.2)	0 - 6.7 (0 - 10.8)	
	Reverse	mph (km/h)	0 - 3.5 (0 - 5.6)	0 - 4.0 (0 - 6.4)	
<b>Braking system (Parking brake)</b>		Disc brake / Foot pedal			
<b>PTO</b>	Type	Belt drive			
	Clutch Type	Electric clutch			
	PTO brake	Dry disc			
<b>Mower deck</b>	Model	RCK42P-90T		RCK48P-90T	
	Mower deck type	Side discharge			
	Mower lift system	Mechanical / Hand Lever			
	Deck depth	in. (mm)	4.5 (114)		
	Belt type		Single-Belt		
	Deck steel thickness	in. (mm)	0.118 (3.0)	0.134 (3.4)	
	Anti scalp roller		Rigid		
	Cutting width of mower	in. (mm)	42 (1067)	48 (1219)	
	Number of blades		2	3	
	Cutting height	in. (mm)	1.0 - 4.0 (25 - 102), 1/4" increment		
Mounting system of mower		Parallel linkage			
<b>Seat</b>		Deluxe high back seat	Deluxe high back seat with armrest and suspension		
<b>Engine stop system</b>		Key stop			
<b>Fuel tank capacity</b>	gallon (ℓ)	3.6 (13.6)			
<b>Battery</b>		U1 (12V, RC:45min, CCA:300, CA:410)			
<b>Generator capacity</b>	amp	16	15		
<b>Hour meter</b>		Standard			

\* Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.

\*\*These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables. The company reserves the right to change the above specifications without notice. Please contact your local Kubota dealer for warranty information.

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.



## KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: [KubotaUSA.com](http://KubotaUSA.com)

©2017 Kubota Corporation

