
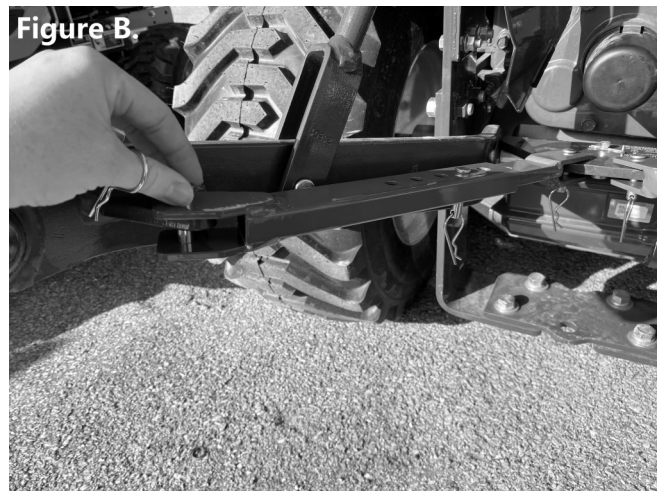


**INSTRUCTION MANUAL**  
**STABILIZER KIT**  
**K2561-38300FR**

**INSTALLATION INSTRUCTIONS**

1. Remove both the check chain assemblies by taking out cotter and clevis pins. See Figure A.
2. Install Stabilizer Bar—Curved end out, Insert new cotter and clevis pins.
3. Place Adjustment pin through overlapping Female and Male Bars, add hair clip to secure.
4. Stabilizer Kit should look like Figure C. when complete.

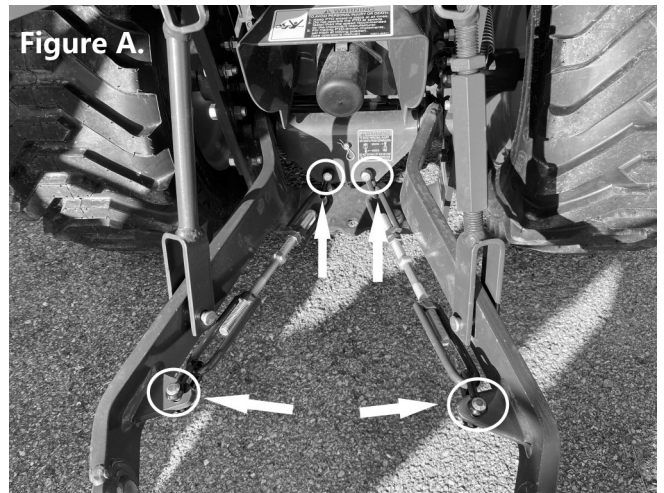

Ref	Part No.	Part Name	QTY
010	BXSTABILIZERF	Female Stabilizer Bar	2
020	BXSTABILIZERM	Male Stabilizer Bar	2
030	HW-0944	Hair Pin Clip	2
040	F-95772	Cotter Pin	4
050	F-95632	Clevis Pin	6

